

### west virginia department of environmental protection

Office of Oil and Gas 601 57th Street SE Charleston, WV 25304 (304) 926-0450 (304) 926-0452 fax Earl Ray Tomblin, Governor Randy C. Huffman, Cabinet Secretary www.dep.wv.gov

August 30, 2013

### WELL WORK PERMIT

### Replacement Borehole H6A

This permit, API Well Number: 47-5101676, issued to NOBLE ENERGY, INC., is evidence of permission granted to perform the specified well work at the location described on the attached pages and located on the attached plat, subject to the provisions of Chapter 22 of the West Virginia Code of 1931, as amended, and all rules and regulations promulgated thereunder, and to all conditions and provisions outlined in the pages attached hereto. Notification shall be given by the operator to the Oil and Gas Inspector at least 24 hours prior to the construction of roads, locations, and/or pits for any permitted work. In addition, the well operator shall notify the same inspector 24 hours before any actual well work is commenced and prior to running and cementing casing. Spills or emergency discharges must be promptly reported by the operator to 1-800-642-3074 and to the Oil and Gas inspector.

Please be advised that form WR-35, Well Operators Report of Well Work is to be submitted to this office within 90 days completion of permitted well work, as should form WR-34 Discharge Monitoring Report within 30 days of discharge of pits, if applicable. Failure to abide by all statutory and regulatory provisions governing all duties and operations hereunder may result in suspension or revocation of this permit and, in addition, may result in civil and/or criminal penalties being imposed upon the operators.

In addition to the applicable requirements of this permit, and the statutes and rules governing oil and gas activity in WV, this permit may contain specific conditions which must be followed. Permit conditions are attached to this cover letter.

Per 35CSR-4-5.2.g this permit will expire in two (2) years from the issue date unless permitted well work is commenced. If there are any questions, please feel free to contact me at (304) 926-0499 ext. 1654.

James Martin

Chief

Operator's Well No: MND9DHS1

Farm Name: CONSOLIDATION COAL COMPA

API Well Number: 47-5101676

Permit Type: Replacement Borehole H6A

Date Issued: 08/30/2013

Promoting a healthy environment.

## **PERMIT CONDITIONS**

West Virginia Code § 22-6A-8(d) allows the Office of Oil and Gas to place specific conditions upon this permit. Permit conditions have the same effect as law. Failure to adhere to the specified permit conditions may result in enforcement action.

### **CONDITIONS**

- 1. If the operator encounters an unanticipated void, or an anticipated void at an unanticipated depth, the operator shall notify the inspector within 24 hours. Modifications to the casing program may be necessary to comply with W. Va. Code § 22-6A-5a (12), which requires drilling to a minimum depth of thirty feet below the bottom of the void, and installing a minimum of twenty (20) feet of casing. Under no circumstance should the operator drill more than fifty (50) feet below the bottom of the void or install less than twenty (20) feet of casing below the bottom of the void.
- 2. When compacting fills, each lift before compaction shall not be more than 12 inches in height, and the fill material shall be within plus or minus 2% (unless soil test results show a greater range of moisture content is appropriate and 95% compaction can still be achieved) of the optimum moisture content as determined by the standard proctor density test, ASTM D698, Standard Test Method for Laboratory Compaction Characteristics of Soil Using Standard Effort. Each lift must meet 95% compaction of the optimum density based on results from the standard proctor density test of the actual soils used in specific engineered fill sites. Each lift shall be tested for compaction, with a minimum of two tests per lift per acre of fill. All test results shall be maintained on site and available for review.
- 3. Operator shall install signage per § 22-6A-8g (6) (B) at all source water locations included in their approved water management plan within 24 hours of water management plan activation.
- 4. Oil and gas water supply wells will be registered with the Office of Oil and Gas and all such wells will be constructed and plugged in accordance with the standards of the Bureau for Public Health set forth in its Legislative rule entitled *Water Well Regulations*, 64 C.S.R. 19. Operator is to contact the Bureau of Public Health regarding permit requirements. In lieu of plugging, the operator may transfer the well to the surface owner upon agreement of the parties. All drinking water wells within fifteen hundred feet of the water supply well shall be flow tested by the operator upon request of the drinking well owner prior to operating the water supply well.
- 5. Pursuant to the requirements pertaining to the sampling of domestic water supply wells/springs the operator shall, no later than thirty (30) days after receipt of analytical data provide a written copy to the Chief and any of the users who may have requested such analyses.
- 6. If any explosion or other accident causing loss of life or serious personal injury occurs in or about a well or well work on a well, the well operator or its contractor shall give notice, stating the particulars of the explosion or accident, to the oil and gas inspector and the Chief, within 24 hours of said accident.
- 7. During the casing and cementing process, in the event cement does not return to the surface, the oil and gas inspector shall be notified within 24 hours.

WW - 6B (3/13)

# STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS WELL WORK PERMIT APPLICATION

1) Well Operator:	Noble	Energy,	Inc.	494501907	051	Franklin	Powhatan Point
r				Operator ID	County	District	Quadrangle
2) Operator's Well 1	Number:	MND9DH	S1	W	Vell Pad Nam	e: MND9	
3 Elevation, current	t ground:	1226.69	Ele	vation, proposed p	ost-construct	tion:	1223
4) Well Type: (a) C	Gas _		Oil	Underground	l Storage		_
	Other _	o					
(b) It		Shallow		Deep			
5) Existing Pad? Ye		Horizontal No	·				
6) Proposed Target	Formation	n(s), Depth(	s), Anticipate	d Thicknesses and	d Associated	Pressure(s):	
Target-Marcellus, Dept							
7) Proposed Total V	ertical De	epth: 6	646'				
8) Formation at Total	al Vertica	l Depth:	Huntersville Ch	nert			
9) Proposed Total M	1easured I	Depth:	16157'				
10) Approximate Fr	esh Water	r Strata Dep	oths: 25	5'			
11) Method to Deter	rmine Fre	sh Water D	epth: Cl	osest well & Seneca Te	echnology data b	ase	
12) Approximate Sa	ıltwater D	epths:	1718'				
13) Approximate Co	oal Seam	Depths:	Sewickley -66	7.4 - 670.7 and Pittsbu	rgh 756.9 - 762.8	3	
14) Approximate De	epth to Po	ssible Void	(coal mine, l	carst, other):	None anticipa	ted-drilling into a pillar	see attached MSHA report
15) Does proposed v				irectly overlying o d depth of mine:	r Yes		
16) Describe propos		500 CO		to the Huntersville Chert a	t an estimated total	vertical depth of app	proximately 6646 feet.
Plug back to the KOP wi	th a solid cem	ent plug. Drill Ho	orizontal leg - stimul	ate and produce the Marc	ellus Formation. S	nould we encounte	r a unanticipated void
we will install a minim	um of 20' of o	casing below th	e void but not mor	re than 50' set a basket a	and grout to surfa	ce.	
17) Describe fractur		1,000					
		10 0112	2 2	I. Stage spacing is depende	nt upon engineering	design. Slickwater t	racturing technique will
be utilized on each stage	ge using sam	u, water, and ci	leriicais.				
Arrana Naria	02 U 10				2 v20		
18) Total area to be		-			(acres):	10.1	
19) Area to be distur	rbed for w	vell pad onl	y, less access	road (acres):	10.1		Page <b>1</b> of <b>3</b>
		)	dS.	fort	8 30	3	rage 1013

WW - 6B (3/13)

### 20)

### CASING AND TUBING PROGRAM

ТҮРЕ	Size	New or Used	Grade	Weight per ft.	FOOTAGE: For Drilling	INTERVALS: Left in Well	CEMENT: Fill -up (Cu. Ft.)
Conductor	20"	Ν	LS	94	40'	40'	CTS
Fresh Water	13 3/8"	N	J-55	54.5	1200'	1200'	CTS
Coal							
Intermediate	9 5/8"	N	J-55	36.0	2500° or 100° below the Big Injun	2500° or 100° Below the Big Injun	CTS
Production	5 1/2"	N	HCP-110	20.0	16157'	16157'	200' above 9.625 shoe
Tubing							
Liners							

WRY 7-25-13

ТҮРЕ	Size	Wellbore Diameter	Wall Thickness	Burst Pressure	Cement Type	Cement Yield
Conductor	20"	24"	.438	2730	Type 1	1.2
Fresh Water	13 3/8"	17 1/2"	.380	2730	Type 1	1.18
Coal						
Intermediate	9 5/8"	12 3/8"	.352	3520	Class A	1.19
Production	5 1/2"	8.75"	.361	12,640	Class A	1.27
Tubing						
Liners						

### **PACKERS**

Kind:	
Sizes:	Received
Depths Set:	
	3 1 2013

21) Describe centralizer placement for each casing string.	Conductor - No centralizers used. Fresh Water & Coal -
Bow spring centralizers on first 2 joints then every third joi	nt to 100 feet from surface. Intermediate - Bow spring
centralizers every third joint to 100' from surface.	
Production - Rigid bow spring every third joint from KOP to TO	C, rigid bow spring every joint to KOP.
22) Describe all cement additives associated with each cem	ent type. Conductor - 1.15% CaCl2.
Fresh Water - 1.15% CaCl2. Coal - 1.15% CaCl2, 0.6% G	Sas migration control additive, 0.5% fluid loss additive,
0.4% Salt tolerant dispersant, and 0.3% defoamer. Intermediate - 10.0	% BWOW NaCl, 0.2% BWOB Anti-foam, 0.3% BWOW Dispersant,
0.4% BWOB Cement retarder. Production: 2.6% Cement extend	ler, 0.7% Fluid Loss additive, 0.5% high temperature retarder,
0.2% friction reducer.	
23) Proposed borehole conditioning procedures. Cond	ductor - The hole is drilled w/ air and casing is run in air. Apart from insuring
the hole is clean via air circulation at TD, there are no other condition	ing procedures. Fresh Water -The hole is drilled w/air and casing
is run in air. Once casing is on bottom, the hole is filled w/ KCl water	and a minimum of one hole volume is circulated prior to pumping
cement. Coal - The hole is drilled w/air and casing is run in air. Once casing is at set	tting depth, the hole is filled w/ KCl water and a minimum of one hole volume
is circulated prior to pumping cement. Intermediate - Once surface casing is set and cem	ented Intermediate hole is drilled either on air or SOBM and filled w/ KCI water once
filled w/ KCI water once drilled to TD. The well is conditioned with KCI circulation	prior to running casing. Once casing is at setting depth, the well is circulated
a minimum of one hole volume prior to pumping cement. Production	n - The hole is drilled with synthetic oil base mud and once at TD
hole is circulated at a drilling pump rate for at least three hours. Once to bulled and casing is run. Once on bottom w/ casing the hole is circulate	

wf # 25-13

# noble energy

# DRILLING WELL PLAN MND-9D-HS-1 (Marcellus HZ)

	1	<b>—</b> "e	ner	gy					Macellus Sha Marshall C		
					М	ND-9D-	HS-1 SH	IL (Lat/Long)	(48759	9.68N, 1638504.35	E) (NAD27)
Groun	d Elevation		1223	•	N	/ND-9D	-HS-1 L	P (Lat/Long)	(48898	0.29N, 1639658.23	E) (NAD27)
	Azm		335.91	1°	М	ND-9D-	HS-1 BH	S-1 BHL (Lat/Long) (496068.09N, 1634718.12E) (		E) (NAD27)	
	ORE DIAGRAM	HOLE	CASING	GEOLOGY	ТОР	BASE	MUD	CEMENT	CENTRALIZERS	CONDITIONING	COMMENTS
	1										
×		26	20" 94#	Conductor	40	40	AIR	To Surface	N/A	Ensure the hole is clean at TD.	Stabilize surface fill/soit. Conductor casing = 0.438" wa thickness
				Sewickly Coal Seam	673	676		15.6 ppg Type 1		Fill with KCI water once	
			13-3/8* 54.5#	Pittsburgh Coal	763	768	8.33ppg	+ 2% CaCl, 0.25# Lost Circ	Bow Spring on first 2 joints then every third	drilled to TD. Once casing is at setting depth, circulate a	Intermediate casing = 0.380*
×	×	17 1/2	J-55 BTC	Base of Freshwater	756	756	WBM	30% Excess	joint to 100' form	minimum of one hole	wall thickness Burst=2730 psi
				Surface Casing	1200	1200	1	Yield = 1.18	surface	volume prior to pumping cement.	Danet 2100 par
×	l x							15.6ppg Class A		Fill with KOL water area	
				Big Lime	1982	2086	8.0ppg-	+0.4% Ret, 0.15% Disp, 0.2% AntiFoam,	Bow spring centralizers	Fill with KCI water once drilled to TD. Once casing is	Casing to be ran 250' below
		12 3/8	9-5/8" 36# J-55 LTC	Big Injun	2086	2291	9.0ppg	0.125#/sk Lost Circ	every third joint to 100'	at setting depth, circulate a minimum of one hole	the 5th Sand. Intermediate casing = 0.352" wall thickness
×	×		3-55 210	Price Formation	2291	2660	SOBM	20% Excess Yield=1.19	feet from surface.	volume prior to pumping	Burst=3520 psi
				Int. Casing	2500	2500	1	To Surface		cement.	(***)
×	×			Weir Sand	2451	2522					
		8.75" Vertical		Berea Sand	2644	2660	8.0ppg - 9.0ppg		Rigid Bow Spring every third joint from KOP to		
		0.75 Vertical		Gordon	2877	2901	SOBM	14.8ppg Class A 25:75:0			
				Rheinstreet		5859		System			
				Sonyea	6156	6175		+2.6% Cement extender, 0.7% Fluid Loss		0t TD -it-tt	
			5-1/2"	Cashaqua	6175	6246		additive, 0.45% high temp retarder, 0.2%		Once at TD, circulate at max allowable pump rate	Production casing = 0.361* wall thickness
X	×		20#	Middlesex	6181.5	6227	12.0ppg-	friction reducer		for at least 6x bottoms up. Once on bottom with	Burst=12640 psi
		8.75" Curve	HCP-110 TXP BTC	West River	6227	6271	12.5ppg SOBM	10% Excess		casing, circulate a minimum	Note:Actual centralizer schedules may be changed
			174 510	Burkett	6271	6298		Yield=1.27	Rigid Bow Spring every	of one hole volume prior to pumping cement.	due to hole conditions
				Tully Limestone	6298	6306.5		TOC >= 200'	joint to KOP	, , , , , , , , , , , , , , , , , , ,	
				Hamilton	6306.5	6327		above 9.625" shoe			
		8.75" - 8.5"		Marcellus	6327	6391	12.0ppg-				
		Lateral		TD	16157	6380	12.5ppg SOBM				
×	x		<u> </u>	Onondaga	6391	6396		<u> </u>	<u></u>	<u> </u>	
		380' TVD / 7517'			Holo C	emented Lo	The state of the s		(N)::::::::::::::::::::::::::::::::::::		TD @ +/-6380' TVD
	LF @ 0	MD				P-110 TXP			+/-864	0' ft Lateral	+/-16157' MD
	X	X	X	X	X		X	X	X	X	X≓centralizers
				Onondaga	6391	6396		17.5ppg			
		8.75" Pilot	Isolation / Sidetrack Cement plugs	Huntersville	6396	6681	12.0ppg- 12.5ppg SOBM	Class H (SLB) from TD to 200' above KOP (2) 800' balanced	N/A	Once at TD, circulate at drilling pump rate for at least three hours. TOOH	OH logs, loggers on location t call TD. Dir. Surveys shoe to TD
				Pilot Hole TD in the Huntersville	6389	6646		plugs w/ 2.375" tubing		and run OH logs.	

	Page of
API Number 47 - 051	- 01676
Operator's Wel	No. MND9DHS1

# STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION OFFICE OF OIL AND GAS

### FLUIDS/ CUTTINGS DISPOSAL & RECLAMATION PLAN

Operator Name_	Noble Energy, Inc.			OP Code 494501907
Watershed (HUC	[ 10] Fish Creek		_ Quadrangle _	Powhatan Point
Elevation 1226.	69	County Marshall		District_Franklin
Do you anticipat Will a pit be used If so, pl Will a s	e using more than 5,00 d for drill cuttings? ease describe anticipate synthetic liner be used it ed Disposal Method Fo  Land Applic Underground Reuse (at A	0 bbls of water to complete Yes No _X ed pit waste: None - Clo n the pit? Yes NA r Treated Pit Wastes: ation d Injection ( UIC Permit N PI Number next anticipated w	sed loop system No If some	so, what ml.?)
Drilling medium  -If oil b  Additives to be to  Drill cuttings dis	ased, what type? Synthused in drilling medium sposal method? Leave	ell? Air, freshwater, oil bas hetic, petroleum, etc. Synth hetic pattericide, polymers, a	netic nd weighting age fsite, etc. All cutti	ngs will be taken off site to an approved facility
		it number? See attachmen		
on August 1, 200 provisions of the law or regulation I certificapplication form obtaining the in	o5, by the Office of Oil c permit are enforceable c can lead to enforceme y under penalty of lav n and all attachments formation, I believe to mitting false informati	and Gas of the West Virging the by law. Violations of a cent action.  In the thick the there is the thick the information is true on, including the possibility.	nia Department ny term or cond xamined and an on my inquiry e, accurate, and	ENERAL WATER POLLUTION PERMIT issued of Environmental Protection. I understand that the ition of the general permit and/or other applicable in familiar with the information submitted on this of those individuals immediately responsible for complete. I am aware that there are significant risonment.
Company Officia				
	al (Typed Name) Dee			
Company Officia	al Title_Regulatory A	nalyst		
Subscribed and s	sworn before me this	3,6th day of 3	Tuly	, 20_13 Notary Public

Form WW-9

O I W-II N	MND9DHS1
Operator's Well No.	

Proposed Revegetation Tre	eatment: Acres Disturbed		Prevegetation	оН
Lime 2-3 tons	Tons/acre or to cor	rect to pH		
		lbs/acre (500 lbs min		
hay or straw Mulch	at 2 tons	Tons/acre		
Withen		Seed Mixtures		
		Seed Whattales		
Seed Type	Area I lbs/acre		Seed Type	rea II lbs/acre
Tall Fescue	40	Tall Fescue	71	40
Ladino Clover	5	Ladino Clove	r	5
Attach: Drawing(s) of road, locatio	on,pit and proposed area fo	land application.		
	olved 7.5' topographic shee	et.		
Photocopied section of inverse Plan Approved by:	olved 7.5' topographic shee	et.		
Photocopied section of inverse Plan Approved by:	olved 7.5' topographic shee	et.		
Photocopied section of inverse Plan Approved by:	olved 7.5' topographic shee	et.		
Photocopied section of inverse Plan Approved by:	olved 7.5' topographic shee	et.		
Photocopied section of inverse Plan Approved by:	olved 7.5' topographic shee	et.		
Photocopied section of inverse Plan Approved by:	olved 7.5' topographic shee	et.		

## west virginia department of environmental protection



# Water Management Plan: Primary Water Sources



WMP-01374

API/ID Number:

047-051-01676

Operator:

Noble Energy, Inc

MND 9DHS1

### Important:

For each proposed primary water source (including source intakes for purchased water sources) identified in your water management plan, and summarized herein, DEP has made an evaluation concerning water availability over the specified date range. DEP's assessment is based on the following considerations:

- •Statistical analysis of historical USGS stream gauge data (transferred to un-gauged locations as necessary);
- •Identification of sensitive aquatic life (endangered species, mussels, etc.);
- Quantification of known existing demands on the water supply (Large Quantity Users);
- Minimum flows required by the Army Corps of Engineers; and
- Designated stream uses.

Based on these factors, DEP has provided, for each intake location (and origination point for purchased water), a reference gauge location and discharge flow reading which must be surpassed prior to withdrawals. Additionally, DEP has established a minimum passby flow at the withdrawal location which must also be surpassed prior to withdrawals. These thresholds are considered terms of the permit and are enforceable as such.

DEP is aware that some intake points will be used for mutiple wells and well sites. In these cases, the thresholds set by the Water Management Plan are to be interepreted as total withdrawal limits for each location over the specified date range regardless of how many wells are supported by that intake.

For all purchased water intakes, determinations of water availability are made at the original source intake location. It is the responsibility of the Oil and Gas Operator, not the seller, to cease withdrawal of water from the seller when flows are less than the minimum gauge reading at the stream gauge referenced by the Water Management Plan in order to protect stream uses.

Note that the determinations made herein are based on the best available data, but it is impossible to predict water availability in the future. While the DEP has carefully established these minimum withdrawal thresholds, it remains the operator's responsibility to protect aquatic life at all times. Approval to withdrawal is contingent upon permission from the land owner. It is the responsibility of the operator to secure and maintain permission prior to any withdrawals.

The operator is reminded that 24-48 hours prior to withdrawing (or purchasing) water, DEP must be notified by email at DEP.water.use@wv.gov.

APPROVED AUG 0 2 2013

### **Source Summary**

WMP-01374 API Number: 047-051-01676 Operator: Noble Energy, Inc MNDS9DHS1 Stream/River Source Wheeling Creek Pump Station 1 @ CNX Land Resources Marshall Owner: Consol Energy Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude: Start Date End Date 6/1/2013 6/1/2014 5,000,000 39.95205 -80.56189 Regulated Stream? Ref. Gauge ID: Wheeling Creek near Majorsville, WV 3111955 Max. Pump rate (gpm): 1,000 Min. Gauge Reading (cfs): 18.23 Min. Passby (cfs) 16.63 **DEP Comments:** Wheeling Creek Pump Station 2 @ CNX Land Resources Marshall Owner: CNX Land Resources, Inc. Source Max. daily purchase (gal) Start Date End Date Total Volume (gal) Intake Latitude: Intake Longitude: 6/1/2013 6/1/2014 4,000,000 39.949578 -80.531256 Regulated Stream? Ref. Gauge ID: 3111955 Wheeling Creek near Majorsville, WV Min. Gauge Reading (cfs): Min. Passby (cfs) Max. Pump rate (gpm): 1,000 18.23 16.24 **DEP Comments:** 

Source Summary Noble Energy, Inc API Number: 047-051-01676 Operator: WMP-01374 MNDS9DHS1 **Purchased Water** West Virginia American West Virginia American Water - Weston Water Treatme Lewis Owner: Source Water Max. daily purchase (gal) Intake Latitude: Intake Longitude: Total Volume (gal) Start Date End Date 6/1/2014 6/1/2013 500,000 7,000,000 Regulated Stream? Stonewall Jackson Dam Ref. Gauge ID: 3061000 WEST FORK RIVER AT ENTERPRISE, WV Max. Pump rate (gpm): Min. Gauge Reading (cfs): 170.57 Min. Passby (cfs) DFP Comments: Ohio **Bethlehem Water Department** Owner: Bethlehem Water Source Department End Date Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude: Start Date 6/1/2013 6/1/2014 3,000,000 200,000 ✓ Regulated Stream? Ohio River Min. Flow Ref. Gauge ID: Ohio River Station: Willow Island Lock & Dam 9999999 Max. Pump rate (gpm): Min. Gauge Reading (cfs): 6,468.00 Min. Passby (cfs) **DEP Comments:** Bethlehem Water Department purchases all its water from the City of Wheeling. Thresholds are set based on the location of the City of Wheeling's raw water intake. Source **Wellsburg Water Department** Brooke Owner: Wellsburg Water Department Start Date End Date Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude: 6/1/2013 6/1/2014 3,000,000 200,000 ✓ Regulated Stream? Ohio River Min. Flow Ref. Gauge ID: 9999999 Ohio River Station: Willow Island Lock & Dam Max. Pump rate (gpm): Min. Gauge Reading (cfs): 6,468.00 Min. Passby (cfs) **DEP Comments:** This alluvial groundwater well is, to some extent, under the influence of the Ohio River. Please adhere to stated minimum flow requirements on the Ohio River for withdrawals. http://www.erh.noaa.gov/er/ohrfc/flows.shtml

Source Moundsville Water Board Marshall Owner: Moundsville Water Treatment Plant

Start Date End Date Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude:

6/1/2013 6/1/2014 3,000,000 2,000,000 - -

Regulated Stream? Ohio River Min. Flow Ref. Gauge ID: 99999999 Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm): Min. Gauge Reading (cfs): 6,468.00 Min. Passby (cfs)

DEP Comments: This alluvial groundwater well is, to some extent, under the influence of the Ohio River.

Please adhere to stated minimum flow requirements on the Ohio River for

withdrawals. http://www.erh.noaa.gov/er/ohrfc/flows.shtml

Source Dean's Water Service Ohio Owner: Dean's Water Service

Start Date End Date Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude:

6/1/2013 6/1/2014 3,000,000 600,000 - -

Regulated Stream? Ohio River Min. Flow Ref. Gauge ID: 9999999 Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm): Min. Gauge Reading (cfs): 6,468.00 Min. Passby (cfs)

DEP Comments:

o Source Wheeling Water Department Ohio Owner: Wheeling Water Department Department

Start Date End Date Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude:

6/1/2013 6/1/2014 5,400,000 17,500 - -

Regulated Stream? Ohio River Min. Flow Ref. Gauge ID: 9999999 Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm): Min. Gauge Reading (cfs): 6,468.00 Min. Passby (cfs)

DEP Comments: Refer to the specified sation on the National Weather Service's Ohio River forecasts at

the following website: http://www.erh.noaa.gov/ohrfc//flows.shtml

Source Ohio County PSD Ohio Owner: Ohio County PSD

Start Date End Date Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude:

720,000

6,468.00

Min. Passby (cfs)

Regulated Stream? Ohio River Min. Flow Ref. Gauge ID: 9999999 Ohio River Station: Willow Island Lock & Dam

3,000,000

Min. Gauge Reading (cfs):

DEP Comments: Refer to the specified station on the National Weather Service's Ohio River forecast website: http://www.erh.noaa.gov/ohrfc//flows.shtml

6/1/2014

6/1/2013

Max. Pump rate (gpm):

Source Summary Operator: Noble Energy, Inc WMP-01374 API Number: 047-051-01676 MNDS9DHS1 **Ground Water** Marshall Owner: **Consol Energy** Shoemaker Groundwater Well #3 Source Start Date End Date Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude: 6/1/2013 6/1/2014 288,000 40.0222 -80.73389 ✓ Regulated Stream? Ohio River Min. Flow Ref. Gauge ID: 9999999 Ohio River Station: Willow Island Lock & Dam Min. Passby (cfs) Max. Pump rate (gpm): 800 Min. Gauge Reading (cfs): 6,468.00 DEP Comments: This alluvial groundwater well is, to some extent, under the influence of the Ohio River. Please adhere to stated minimum flow requirements on the Ohio River for withdrawals. http://www.erh.noaa.gov/er/ohrfc/flows.shtml Shoemaker Groundwater Well #4 Marshall Owner: Consol Energy Source Start Date End Date Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude: 6/1/2013 6/1/2014 288,000 40.022293 -80.733586 ✓ Regulated Stream? Ohio River Min. Flow Ref. Gauge ID: 9999999 Ohio River Station: Willow Island Lock & Dam Min. Passby (cfs) Max. Pump rate (gpm): 800 Min. Gauge Reading (cfs): 6,468.00 DEP Comments: This alluvial groundwater well is, to some extent, under the influence of the Ohio River. Please adhere to stated minimum flow requirements on the Ohio River for withdrawals. http://www.erh.noaa.gov/er/ohrfc/flows.shtml Source Shoemaker Groundwater Well #5 Marshall Owner: **Consol Energy** End Date Max. daily purchase (gal) Start Date Total Volume (gal) Intake Latitude: Intake Longitude: 6/1/2014 6/1/2013 288,000 40.021256 -80.734568 ✓ Regulated Stream? Ohio River Min. Flow Ref. Gauge ID: Ohio River Station: Willow Island Lock & Dam 9999999 800 Min. Gauge Reading (cfs): 6,468.00 Min. Passby (cfs) Max. Pump rate (gpm): **DEP Comments:** This alluvial groundwater well is, to some extent, under the influence of the Ohio River. Please adhere to stated minimum flow requirements on the Ohio River for withdrawals. http://www.erh.noaa.gov/er/ohrfc/flows.shtml

Start Date End Date Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude: 6/1/2013 6/1/2014 288,000 40.02076 -80.73397


Regulated Stream? Ohio River Min. Flow Ref. Gauge ID: 99999999 Ohio River Station: Willow Island Lock & Dam

Max. Pump rate (gpm): 800 Min. Gauge Reading (cfs): 6,468.00 Min. Passby (cfs)

DEP Comments: This alluvial groundwater well is, to some extent, under the influence of the Ohio River.

Please adhere to stated minimum flow requirements on the Ohio River for

withdrawals. http://www.erh.noaa.gov/er/ohrfc/flows.shtml

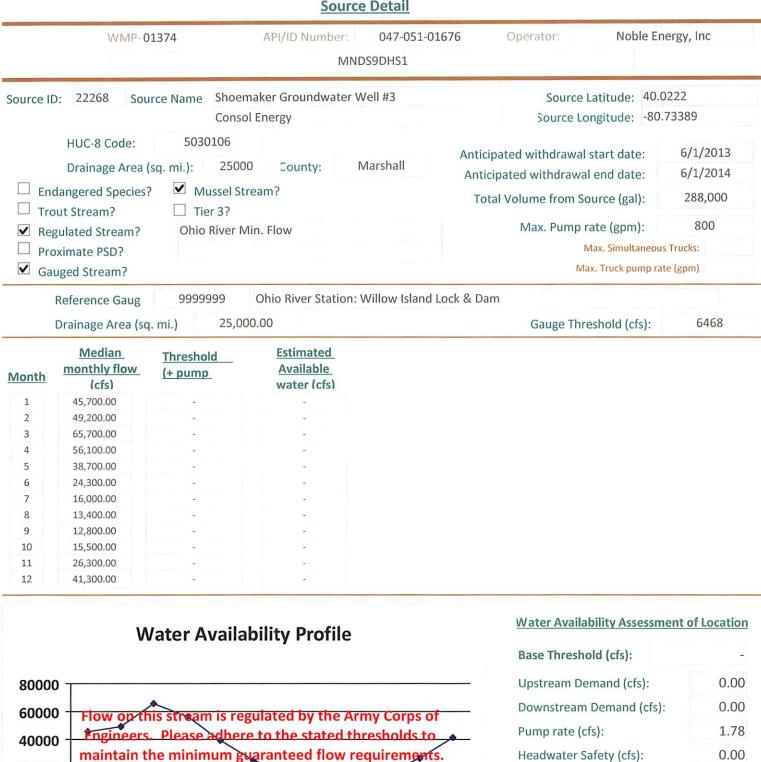

11

10

12

3

5

6

Median Monthly Flow — Threshold

20000

0

1


0.00

Ungauged Stream Safety (cfs):

Min. Gauge Reading (cfs):

Passby at Location (cfs):

<sup>&</sup>quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

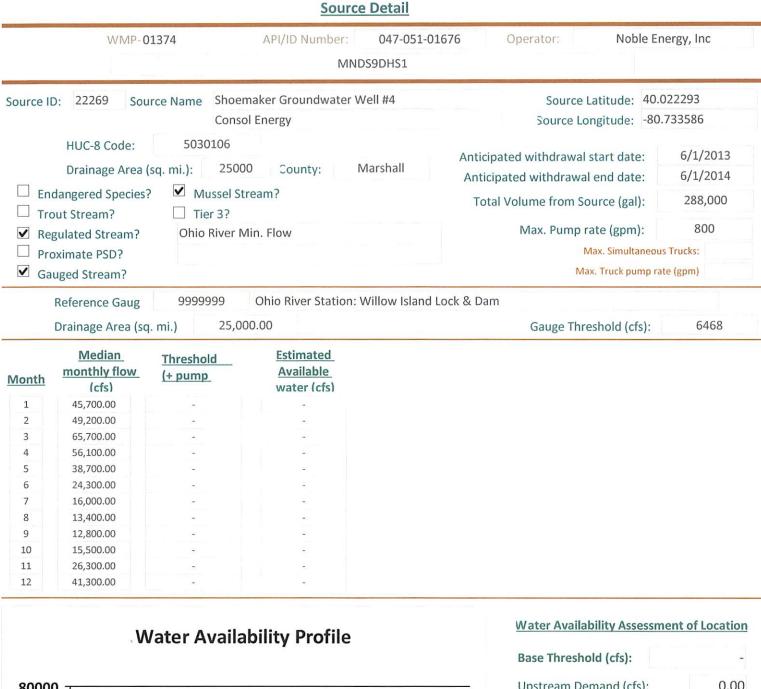


	Water Availability Profile
80000 -	
60000 -	Flow on this stream is regulated by the Army Corps of
40000 -	Engineers. Please adhere to the stated thresholds to
20000 -	maintain the minimum guaranteed flow requirements.
0 -	
	1 2 3 4 5 6 7 8 9 10 11 12
	→ Median Monthly Flow — Threshold

Base Threshold (cfs):	-
Upstream Demand (cfs):	0.00
Downstream Demand (cfs):	0.00
Pump rate (cfs):	1.78
Headwater Safety (cfs):	0.00
Ungauged Stream Safety (cfs):	0.00

<sup>&</sup>quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.




Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	45,700.00	-	~
2	49,200.00	-	2
3	65,700.00	-	-
4	56,100.00	-	-
5	38,700.00	-	-
6	24,300.00	-	
7	16,000.00		-
8	13,400.00	-	
9	12,800.00		-
10	15,500.00	-	-
11	26,300.00	-	-
12	41,300.00		2

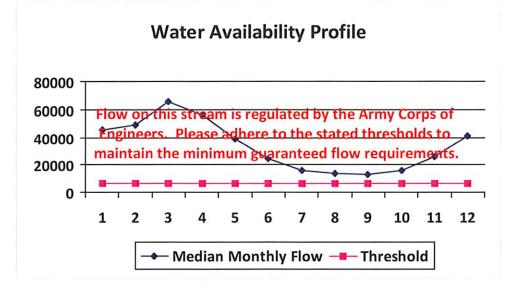


Water Availability Assessment of	Location
Base Threshold (cfs):	-
Upstream Demand (cfs):	0.00
Downstream Demand (cfs):	0.00
Pump rate (cfs):	1.78
Headwater Safety (cfs):	0.00
Ungauged Stream Safety (cfs):	0.00

<sup>&</sup>quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

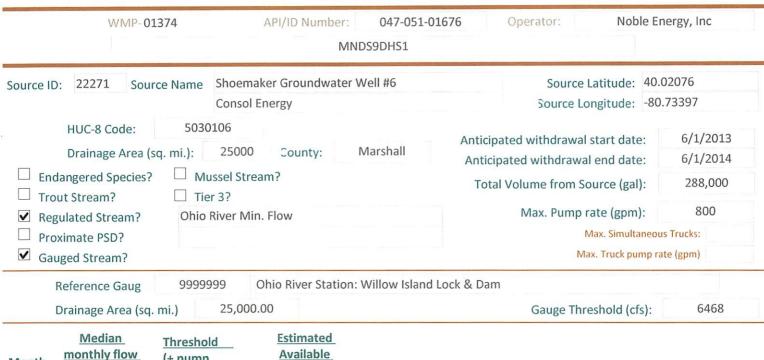

Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	45,700.00	2	
2	49,200.00	E	-
3	65,700.00	-	-
4	56,100.00	-	-
5	38,700.00	-	~
6	24,300.00	-	
7	16,000.00	-	-
8	13,400.00	-	15.
9	12,800.00	-	-
10	15,500.00	-	-
11	26,300.00	-	-
12	41,300.00		

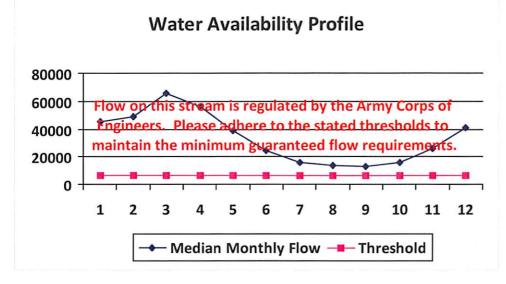

### Water Availability Assessment of Location

Base Threshold (cfs):	-
Upstream Demand (cfs):	0.00
Downstream Demand (cfs):	0.00
Pump rate (cfs):	1.78
Headwater Safety (cfs):	0.00
Ungauged Stream Safety (cfs):	0.00

<sup>&</sup>quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

			Source	<u>Detail</u>			
,	WMP-0	1374	API/ID Number:	047-051-016 0S9DHS1	76 Operator: Noble Ene	rgy, Inc	
Source II	D: 22272 Sou HUC-8 Code: Drainage Area (	West 5020002 (sq. mi.): 104.8	1		Source Longitude: - Anticipated withdrawal start date: Anticipated withdrawal end date:	6/1/2013 6/1/2014	
☐ Tro	out Stream? gulated Stream? oximate PSD? uged Stream?	☐ Tier 3? Stonewall Ja Weston WTF	ckson Dam		Total Volume from Source (gal):  Max. Pump rate (gpm):  Max. Simultaneous Total  Max. Truck pump rate		
	Reference Gaug Drainage Area (so			AT ENTERPRISE,	WV Gauge Threshold (cfs):	234	
Month  1 2 3 4 5 6 7 8 9 10 11 12	Median monthly flow (cfs) 321.23 361.67 465.85 266.43 273.47 137.03 88.78 84.77 58.98 57.83 145.12 247.76	Threshold (+ pump	Estimated Available water (cfs)				
500 - 400 -			bility Profile	my Corps of	Water Availability Assessme  Base Threshold (cfs):  Upstream Demand (cfs):  Downstream Demand (cfs):	24.32 0.00	
300 - 200 - 100 -	1		e to the stated th uaranteed flow re	/	Pump rate (cfs):  Headwater Safety (cfs):  Ungauged Stream Safety (cfs	8.08 s): 0.00	

Min. Gauge Reading (cfs): Passby at Location (cfs):

◆ Median Monthly Flow ■ Threshold

<sup>&</sup>quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

			Source	e Detail			
	WMP-0	1374	API/ID Number:	047-051-0167 0S9DHS1	6 Operator:	Noble Ene	ergy, Inc
Source II	): 22273 Sou		lehem Water Departm lehem Water Departm			Latitude: - ongitude: -	
☐ Tro	HUC-8 Code: Drainage Area ( dangered Species? out Stream? gulated Stream?		tream?	Ohio	Anticipated withdrawa Anticipated withdrawa Total Volume from S Max. Pump	al end date: Source (gal):	6/1/2013 6/1/2014 3,000,000
✓ Pro	oximate PSD? uged Stream?	City of Whe				Max. Simultaneous lax. Truck pump rate	
	Reference Gaug Drainage Area (sq	9999999 . mi.) 25,0	Ohio River Station: 000.00	Willow Island Loc		reshold (cfs):	6468
Month  1 2 3 4 5	Median monthly flow (cfs) 45,700.00 49,200.00 65,700.00 56,100.00 38,700.00	Threshold (+ pump	Estimated Available water (cfs)				
6 7 8 9 10 11 12	24,300.00 16,000.00 13,400.00 12,800.00 15,500.00 26,300.00 41,300.00						
8000	0	/ater Availa	ability Profile		Base Thresh Upstream D	ability Assessmental (cfs): emand (cfs): n Demand (cfs):	ent of Location

Base Threshold (cfs):	-
Upstream Demand (cfs):	
Downstream Demand (cfs):	
Pump rate (cfs):	
Headwater Safety (cfs):	0.00
Ungauged Stream Safety (cfs):	0.00

maintain the minimum guaranteed flow requirem Median Monthly Flow — Threshold

<sup>&</sup>quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

			Source Deta	<u>II</u>	
	WMP-C	1374	API/ID Number: 047- MNDS9DHS		nergy, Inc
Source II	D: 22274 Sou		ourg Water Department ourg Water Department	Source Latitude: -	
☐ Tro  ✓ Re	HUC-8 Code: Drainage Area of dangered Species out Stream? gulated Stream? pximate PSD? luged Stream?		Anticipated withdrawal start date: Anticipated withdrawal end date: Total Volume from Source (gal):  Max. Pump rate (gpm):  Max. Simultaneou  Max. Truck pump rate		
	Reference Gaug	9999999	Ohio River Station: Willow	sland Lock & Dam	
	Drainage Area (sc	j. mi.) 25,00	0.00	Gauge Threshold (cfs):	6468
Month  1 2 3	Median monthly flow (cfs) 45,700.00 49,200.00 65,700.00	Threshold (+ pump	Estimated Available water (cfs)		
4 5 6 7	56,100.00 38,700.00 24,300.00 16,000.00				
8 9 10 11	13,400.00 12,800.00 15,500.00 26,300.00 41,300.00	-			
				Water Availability Assessm	nent of Location
8000		/ater Availa	bility Profile	Base Threshold (cfs):  Upstream Demand (cfs):	_
6000	0 Flow on th		ulated by the Army Co to the stated threshol	•	:
2000	maintain t	he minimum gu	aranteed flow requirer	Headwater Safety (cfs):  Ungauged Stream Safety (cfs):	0.00 efs): 0.00

7

◆ Median Monthly Flow ■ Threshold

12

10 11

Min. Gauge Reading (cfs):

Passby at Location (cfs):

1

2

<sup>&</sup>quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

			Source Deta	<u>[all</u>	
	WMP-0	1374	API/ID Number: 047- MNDS9DHS	17-051-01676 Operator: Noble Energy, Inc	
Source II	D: 22275 Sou	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	dsville Water Board dsville Water Treatment Plar	Source Latitude: - lant Source Longitude: -	
☐ Tro	HUC-8 Code: Drainage Area ( dangered Species? out Stream? gulated Stream? oximate PSD? uged Stream?		eam?	Anticipated withdrawal start date: 6/1/2013 Anticipated withdrawal end date: 6/1/2014  Total Volume from Source (gal): 3,000,000  Max. Pump rate (gpm):  Max. Simultaneous Trucks:  Max. Truck pump rate (gpm)	
	Reference Gaug Drainage Area (sq	9999999 . mi.) 25,00	Ohio River Station: Willow I 0.00	w Island Lock & Dam  Gauge Threshold (cfs): 6468	
Month  1 2 3 4 5 6 7 8 9 10 11 12	Median monthly flow (cfs) 45,700.00 49,200.00 65,700.00 38,700.00 24,300.00 16,000.00 13,400.00 12,800.00 15,500.00 26,300.00 41,300.00	Threshold (+ pump	Estimated Available water (cfs)		
8000 6000 4000 2000	0 Flow on the fingineers maintain to	is stream is reg	culated by the Army Core to the stated threshol	olds to Pump rate (cfs):	

7

◆ Median Monthly Flow ■ Threshold

12

10 11

Min. Gauge Reading (cfs):

Passby at Location (cfs):

3

<sup>&</sup>quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

WMP-01	374	API/ID Number:	047-051-016 NDS9DHS1	Operator:	Noble Energy,	Inc	
Source ID: 22276 Sour	oc manne	Water Service Water Service			Latitude: - ngitude: -		
HUC-8 Code: 5030106  Drainage Area (sq. mi.): 25000 County: Ohio  □ Endangered Species? ✓ Mussel Stream?  □ Trout Stream? □ Tier 3?  ✓ Regulated Stream? Ohio River Min. Flow				Anticipated withdrawal start date:  Anticipated withdrawal end date:  Total Volume from Source (gal):  Max. Pump rate (gpm):			
☐ Proximate PSD?  ✓ Gauged Stream?				Ma	Max. Simultaneous Truck		
Reference Gaug Drainage Area (sq.	9999999 mi.) 25,00	Ohio River Station 0.00	n: Willow Island Lo		eshold (cfs):	6468	
Month         Median monthly flow (cfs)           1         45,700.00           2         49,200.00           3         65,700.00           4         56,100.00           5         38,700.00           6         24,300.00           7         16,000.00           8         13,400.00           9         12,800.00           10         15,500.00           11         26,300.00           12         41,300.00	Threshold (+ pump	Estimated Available water (cfs)					
80000 T	ater Availa	bility Profile		Water Availa Base Thresho Upstream De		of Location - 0.00	
60000 Flow on the	Please adher	gulated by the A e to the stated t yaranteed flow	thresholds to	Pump rate (c)		0.00	
1 2 3	4 5	6 7 8	9 10 11	12 Min. Gauge	Reading (cfs):		

→ Median Monthly Flow - Threshold

Passby at Location (cfs):

<sup>&</sup>quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

			Source	e Detail		
	WMP- <b>C</b>	01374	API/ID Number:	047-051-010 0S9DHS1	676 Operator: Noble En	ergy, Inc
Source II	D: 22278 Sou		ling Water Departme ling Water Departme		Source Latitude: - Source Longitude: -	
☐ Tro  ✓ Re	HUC-8 Code: Drainage Area dangered Species out Stream? gulated Stream? oximate PSD? uged Stream?	? Mussel Str  Tier 3? Ohio River M	ream?	Ohio	Anticipated withdrawal start date: Anticipated withdrawal end date: Total Volume from Source (gal): Max. Pump rate (gpm): Max. Simultaneous Max. Truck pump rate	
	Reference Gaug Drainage Area (so	9999999 q. mi.) 25,00	Ohio River Station: \00.00	Willow Island L	ock & Dam  Gauge Threshold (cfs):	6468
Month  1 2 3 4 5 6 7 8 9 10 11 12	Median monthly flow (cfs) 45,700.00 49,200.00 65,700.00 56,100.00 24,300.00 16,000.00 13,400.00 12,800.00 15,500.00 26,300.00 41,300.00	Threshold (+ pump	Estimated Available water (cfs)			
8000 6000 4000 2000	O Flow on the fingineers maintain to	nis stream is reg	bility Profile gulated by the Arie to the stated the stated flow re	resholds to		0.00
	1 2	3 4 5	6 7 8 9	10 11	12 Min. Gauge Reading (cfs):	_

◆ Median Monthly Flow ■ Threshold

Passby at Location (cfs):

<sup>&</sup>quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

			<u>30010</u>	e Detail				
	WMP-0	1374	API/ID Number:	047-051-016 DS9DHS1	676	Operator: Noble E	nergy, Inc	
Source I	D: 22279 Sou		County PSD county PSD		A. A.:	Source Latitude: -	6/1/2013	
Drainage Area (sq. mi.): 25000 County:  ☐ Endangered Species? ✓ Mussel Stream? ☐ Trout Stream? ☐ Tier 3? ✓ Regulated Stream? Ohio River Min. Flow		Ohio	Ohio  Anticipated withdrawal start date: Anticipated withdrawal end date:  Total Volume from Source (gal):  Max. Pump rate (gpm):		6/1/2013 6/1/2014 3,000,000			
	oximate PSD? nuged Stream?	wheeling wa	ater Department			Max. Truck pump		
	Reference Gaug  Drainage Area (sc	9999999 . mi.) 25,00	Ohio River Station:	Willow Island Lo	ock & Dam	Gauge Threshold (cfs):	6468	
Month  1 2 3 4 5 6 7 8 9 10 11 12	Median monthly flow (cfs) 45,700.00 49,200.00 65,700.00 38,700.00 24,300.00 16,000.00 13,400.00 12,800.00 26,300.00 41,300.00	Threshold (+ pump	Estimated Available water (cfs)					
8000 6000 4000 2000	Flow on the fingineers maintain t	nis stream is re	gulated by the Aire to the stated the	resholds to	•	Water Availability Assess  Base Threshold (cfs):  Upstream Demand (cfs):  Downstream Demand (cfs):  Pump rate (cfs):  Headwater Safety (cfs):  Ungauged Stream Safety	0.00	

◆ Median Monthly Flow ■ Threshold

10 11

12


Min. Gauge Reading (cfs): Passby at Location (cfs):

3

<sup>&</sup>quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.



Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)	
1	0.00	18.66		
2	0.00	18.66		
3	0.00	18.66		
4	0.00	18.66		
5	0.00	18.66	-	
6	0.00	18.66	-	
7	0.00	18.66	-	
8	0.00	18.66	-	
9	0.00	18.66	-	
10	0.00	18.66	-	
11	0.00	18.66		
12	0.00	18.66	-	

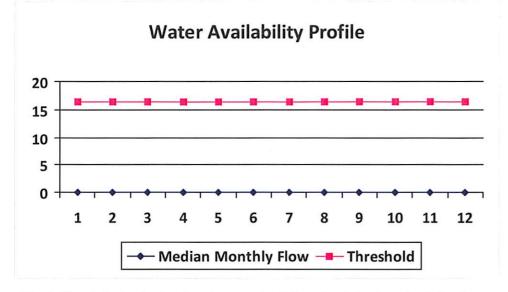


Water Availability Assessment of	f Location
Base Threshold (cfs):	16.43
Upstream Demand (cfs):	0.00
Downstream Demand (cfs):	0.00
Pump rate (cfs):	2.23
Headwater Safety (cfs):	0.00
Ungauged Stream Safety (cfs):	0.00
Min. Gauge Reading (cfs):	18.23
Passby at Location (cfs):	16.43

<sup>&</sup>quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.



Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)	
1	0.00	18.27	-	
2	0.00	18.27	-	
3	0.00	18.27	-	
4	0.00	18.27	-	
5	0.00	18.27	-	
6	0.00	18.27	-	
7	0.00	18.27	-	
8	0.00	18.27		
9	0.00	18.27	-	
10	0.00	18.27	-	
11	0.00	18.27	-	
12	0.00	18.27		

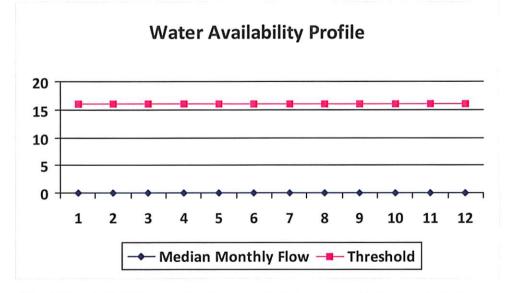

Water Availability Assessment of	Location
Base Threshold (cfs):	16.04
Upstream Demand (cfs):	0.00
Downstream Demand (cfs):	0.00
Pump rate (cfs):	2.23
Headwater Safety (cfs):	0.00
Ungauged Stream Safety (cfs):	0.00
Min. Gauge Reading (cfs):	18.23
Passby at Location (cfs):	16.04

<sup>&</sup>quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

## west virginia department of environmental protection



# Water Management Plan: **Secondary Water Sources**



WMP-01374

API/ID Number

047-051-01676

Operator:

Noble Energy, Inc

MNDS9DHS1

### Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

### Multi-site impoundment

Source ID: 22280 Source Name

SHL #1 Impoundment

Source start date:

6/1/2013

Source end date:

6/1/2014

Source Lat:

39.979696

Source Long:

-80.579465

County

Marshall

Max. Daily Purchase (gal)

Total Volume from Source (gal):

3,400,000

**DEP Comments:** 

The intake identified above has been defined in a previous water management plan. The thresholds established in that plan govern this water management plan unless otherwise noted.

Reference: WMP-200

### MNDS9DHS1

### Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

SHL #2 Impoundment (WV51-WPC-00001) Source ID: 22281 Source Name 6/1/2013 Source start date: Source end date: 6/1/2014 Marshall 39.966973 -80.561377 Source Lat: Source Long: County 4,100,000 Total Volume from Source (gal): Max. Daily Purchase (gal) **DEP Comments:** 

The intake identified above has been defined in a previous water management plan. The thresholds established in that plan govern this water management plan unless otherwise noted.

Reference: WMP-201

SHL #3 Impoundment (WV51-WPC-00002) Source ID: 22282 Source Name Source start date: 6/1/2013 6/1/2014 Source end date: Source Lat: 39.974133 Source Long: -80.55527 County Marshall 4,300,000 Total Volume from Source (gal): Max. Daily Purchase (gal) DFP Comments:

The intake identified above has been defined in a previous water management plan. The thresholds established in that plan govern this water management plan unless otherwise noted.

Reference: WMP-202

WMP-01374 API/ID Number 047-051-01676 Operator: Noble Energy, Inc

### MNDS9DHS1

### Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

SHL #4 Impoundment (WV51-WPC-00003) Source ID: 22283 Source Name 6/1/2013 Source start date: 6/1/2014 Source end date: Marshall 39.963284 Source Long: -80.562743 County Source Lat: 4,100,000 Total Volume from Source (gal): Max. Daily Purchase (gal) **DEP Comments:** 

The intake identified above has been defined in a previous water management plan. The thresholds established in that plan govern this water management plan unless otherwise noted.

Environmental Protection.

Reference: WMP-204

### **Purchased Water**

Bridgeport Ohio Water Department Source ID: 22277 Source Name 6/1/2013 Source start date: Public Water Provider 6/1/2014 Source end date: 40.08348 -80.736488 County Source Long: Source Lat: 3,000,000 Max. Daily Purchase (gal) 200,000 Total Volume from Source (gal): Please ensure that purchases from this source are approved by, and completed in **DEP Comments:** 

accordance with, requirements set forth by the State of Ohio Department of

WMP-01374 API/ID Number 047-051-01676 Operator: Noble Energy, Inc

MNDS9DHS1

### Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

### **Recycled Frac Water**

Source ID: 22284 Source Name		MNDS9 Wells		Source start date	e: 6/1/2013		
						Source end date	e: 6/1/2014
		Source Lat:		Source Long:		County	
		Max. Daily Pu	rchase (gal)		Total Volume	from Source (gal):	8,000,000
	DEP Co	omments:					

